





- + POWERFUL N-TYPE TOPCON CELLS
- + BC: MAXIMUM EFFICIENCY AND IMPROVED HOT SPOT BEHAVIOUR
- + BC: HIGHER PERFORMANCE IN PARTIAL SHADING CONDITIONS
- + DOUBLE GLASS: HIGHER MECHANICAL AND THERMAL STABILITY
- + REDUCTION OF BALANCE-OF-SYSTEM-COSTS THROUGH HIGHER PERFORMANCE PER MODULE

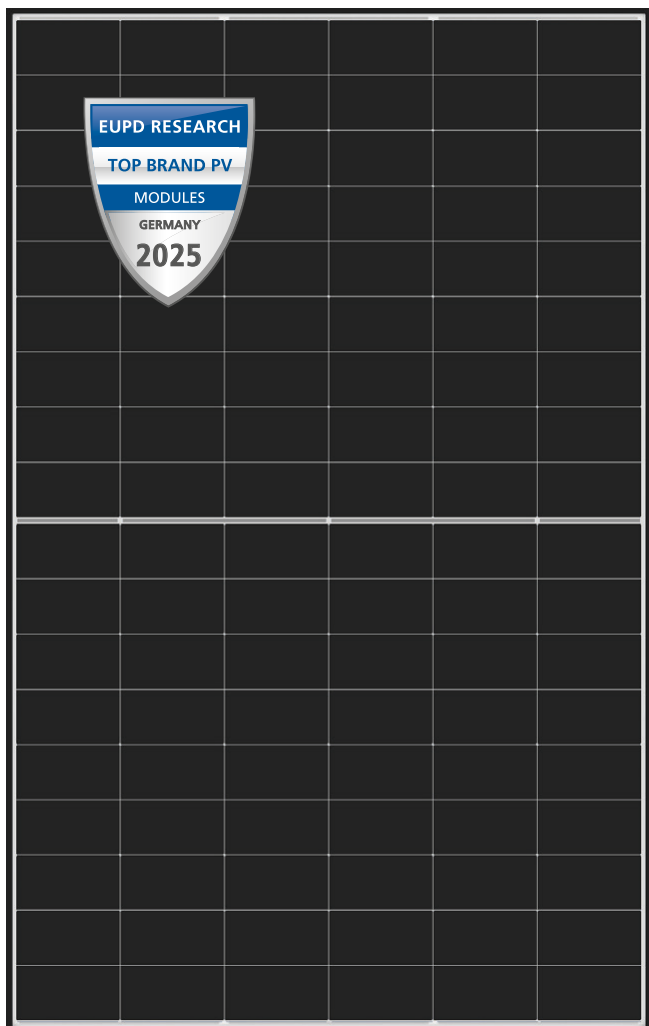

linear performance
guarantee¹

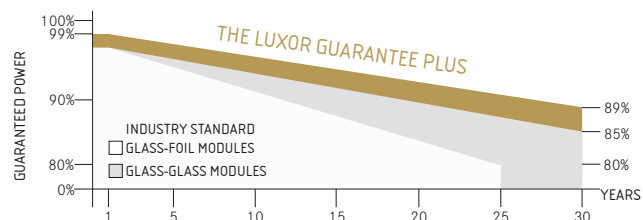

ECO LINE PRIME 475-495W

TOPCON BLACK WHITE

GLASS-GLASS, BIFACIAL, 1800MM X 1134MM



Longlife tested



Power proofed



Safety provided




Selection of
components



Back glass



Performance surplus
of 0 Wp to 6.49 Wp



Higher heat
dispensing



PID free
LID Free



German
warrantor

ECO LINE PRIME 475-495W

TOPCON, GLASS-GLASS, BIFACIAL, BW, 182R192-108+

Module type

LX - XXXM/182R192-108+ GG | XXX = Rated power Pmpp

Electrical data at STC

Rated power Pmpp [Wp]	475.00	480.00	485.00	490.00	495.00
Pmpp range to	481.49	486.49	491.49	496.49	501.49
Rated current Impp [A]	14.24	14.35	14.45	14.56	14.66
Rated voltage Vmpp [V]	33.38	33.48	33.58	33.68	33.78
Short-circuit current Isc [A]	14.83	14.95	15.05	15.17	15.27
Open-circuit voltage Uoc [V]	40.41	40.53	40.65	40.77	40.90
Efficiency at STC up to	23.59%	23.83%	24.08%	24.32%	24.57%
Efficiency at 200 W/m ²	23.04%	23.29%	23.52%	23.77%	24.00%

Electrical data at NOCT

Power at Pmpp [Wp]	359.48	363.26	367.05	370.83	374.62
Rated current Impp [A]	11.51	11.59	11.68	11.76	11.85
Rated voltage Vmpp [V]	31.23	31.34	31.43	31.53	31.61
Short-circuit current Isc [A]	11.98	12.08	12.16	12.26	12.34
Open-circuit voltage Uoc [V]	37.30	37.42	37.54	37.67	37.80

Specification as per STC (Standard test conditions): irradiance 1000 W/m² | module temperature 25°C | Air Mass = 1.5
NOCT (nominal operating cell temperature): irradiance 800 W/m² | wind speed 1 m/sec | ambient temperature 20°C |
cell operating temperature 45 +/- 2°C | Air Mass = 1.5

Electrical data at BNPI

Rated power Pmpp [Wp]	475.00	480.00	485.00	490.00	495.00
Maximum Rated power Pmpp [Wp]	526.30	531.84	537.38	542.92	548.46
Rated current Impp [A]	15.78	15.90	16.01	16.13	16.24
Rated voltage Vmpp [V]	33.36	33.45	33.56	33.65	33.77
Short-circuit current Isc [A]	16.43	16.56	16.68	16.81	16.92
Open-circuit voltage Uoc [V]	40.45	40.57	40.69	40.81	40.94

Specifications as per BNPI (Bifacial Nameplate Irradiance): irradiance front 1000 W/m² | rear 135 W/m² | Temperature 25°C | Air Mass 1.5

Limiting values

Max. system voltage max. return current	1000 V or 1500 V 30 A
Safety class Fire safety class	II C (IEC 61730)
Operating temperature	-40 up to 85°C
Max. tested pressure/tensile load ²	6000 Pa / 4000 Pa

Temperature coefficient

Temperature coefficient [U] [I] [P]	-0.2 %/°C 0.05 %/°C -0.27 %/°C
---	------------------------------------

Specifications

Cells (matrix) Wafer Type	108 (6x18) M10 N-Type TOPCon BC
Module dimensions (L x B x H) ³ Weight	1800 mm x 1134 mm x 30 mm 24.5 kg
Bifaciality factor ⁵	Up to 80%
Front side	2.0 mm semi tempered anti-reflection solar glass
Back side	2.0 mm semi tempered solar glass, white mesh
Frame	Stable anodised aluminium frame
Embedding material	POE / EVA
Junction Box Diodes	IP68 3 Schottky Diodes
Cable	Symmetrical cable lengths > 1.1 m, 4 mm ² solar cable
Connectors	MC4 or equivalent (IP67)
Hail test (max. hailstorm)	Ø 45 mm impact velocity 30.7 m/s ± 110.5 km/h

The specifications and average values can vary slightly. Relevant is the corresponding data of the individual measurement.

Specifications are subject to change without notice. Tolerance depending on equipment: rated power +/- 3%, other values +/- 10%.

All information given in this data sheet corresponds to DIN EN 50380. A potential light-induced degradation of the power after commissioning is not considered here. Further information in the installation manuals.

1 The specific warranty conditions are given under www.luxor.solar/downloads.html

2 Horizontal mounted (IEC61215), for details please check mounting instruction


3 Tolerance L/W = +/- 3 mm, H +/- 2 mm, the dimensions given in the order confirmation will be decisive

4 Location and dimensions of holes on request

5 N-Type TOPCon BC Bifaciality factor 77 +/- 3 %


Your specialised Luxor partner

Back - / Frontview^{3, 4}

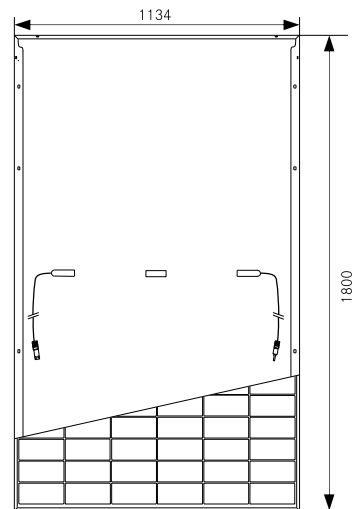


Electrical characteristics

UI-diagram e.g. 480 Wp

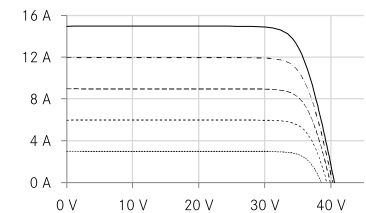

UP-diagram e.g. 480 Wp

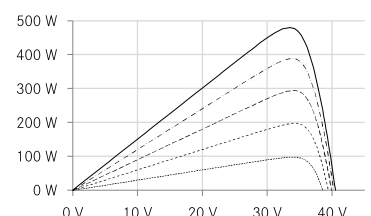

..... 200W/m²
- - - - - 400W/m²
- - - - - 600W/m²
- - - - - 800W/m²
————— 1000W/m²



Guidelines:

93/68/EEC

2014/35/EU, (LVD)

2014/30/EU, (EMC)

The validity of the certificates/listings for a specific country has to be examined under:

www.luxor.solar/downloads.html