

- + NON-REFLECT: SPECIAL GLASS FOR LEAST REFLECTION
- + APPLICATIONS: NEAR AIRPORTS, MOTORWAYS, PROTECTED AREAS
- + POWERFUL N-TYPE TOPCON CELLS
- + DOUBLE GLASS: HIGHER MECHANICAL AND THERMAL STABILITY
- + BIFACIAL: DOUBLE-SIDED POWER GENERATION FOR MORE YIELD



product guarantee<sup>1</sup>



linear performance guarantee<sup>1</sup>



## ECO LINE PRO NON-REFLECT 450-470W

## TOPCON BLACK WHITE

GLASS-GLASS, BIFACIAL, 1762MM X 1134MM



Longlife tested



Power proofed



Safety provided



Selection of components



Back glass



Performance surplus of 0 Wp to 6.49 Wp



Higher heat dispensing



PID free  
LID Free



German warrantor

# ECO LINE PRO NON-REFLECT 450-470W

## TOPCON, GLASS-GLASS, BIFACIAL, BW, 182R-96+

Module type LX - XXXM/182R-96+ GG | XXX = Rated power Pmpp

### Electrical data at STC

Rated power Pmpp [Wp]	450.00	455.00	460.00	465.00	470.00
Pmpp range to	456.49	461.49	466.49	471.49	476.49
Rated current Imp [A]	15.17	15.27	15.37	15.46	15.55
Rated voltage Vmpp [V]	29.68	29.82	29.96	30.10	30.24
Short-circuit current Isc [A]	16.04	16.14	16.25	16.34	16.44
Open-circuit voltage Uoc [V]	35.93	36.10	36.27	36.44	36.61
Efficiency at STC up to	22.85%	23.10%	23.35%	23.60%	23.85%
Efficiency at 200 W/m <sup>2</sup>	22.29%	22.55%	22.80%	23.04%	23.28%

### Electrical data at NOCT

Power at Pmpp [Wp]	339.12	342.89	346.66	350.42	354.19
Rated current Imp [A]	12.25	12.33	12.41	12.48	12.55
Rated voltage Vmpp [V]	27.68	27.81	27.93	28.08	28.22
Short-circuit current Isc [A]	12.95	13.03	13.12	13.19	13.27
Open-circuit voltage Uoc [V]	33.16	33.33	33.50	33.67	33.83

Specification as per STC (Standard test conditions): irradiance 1000 W/m<sup>2</sup> | module temperature 25°C | Air Mass = 1.5  
 NOCT (nominal operating cell temperature): irradiance 800 W/m<sup>2</sup> | wind speed 1 m/sec | ambient temperature 20°C | cell operating temperature 45 +/- 2°C | Air Mass = 1.5

### Electrical data at BNPI

Rated power Pmpp [Wp]	450.00	455.00	460.00	465.00	470.00
Maximum Rated power Pmpp [Wp]	498.60	504.14	509.68	515.22	520.76
Rated current Imp [A]	16.81	16.92	17.03	17.13	17.23
Rated voltage Vmpp [V]	29.66	29.80	29.93	30.08	30.23
Short-circuit current Isc [A]	17.77	17.88	18.01	18.10	18.22
Open-circuit voltage Uoc [V]	35.97	36.14	36.31	36.48	36.65

Specifications as per BNPI (Bifacial Nameplate Irradiance) : irradiance front 1000 W/m<sup>2</sup> | rear 135 W/m<sup>2</sup> | Temperature 25°C | Air Mass 1.5

### Limiting values

Max. system voltage   max. return current	1000 V or 1500 V   30 A
Safety class   Fire safety class	II   C (IEC 61730)
Operating temperature	-40 up to 85°C
Max. tested pressure/tensile load <sup>2</sup>	6000 Pa / 4000 Pa

### Temperature coefficient

Temperature coefficient [U]   [I]   [P]	-0.25 %/°C   0.045 %/°C   -0.29 %/°C
---	--------------------------------------


### Specifications

Cells (matrix)   Wafer   Type	96 (6x16)   M10   N-Type TOPCon
Module dimensions (L x B x H) <sup>3</sup>   Weight	1762 mm x 1134 mm x 30 mm   24.5 kg
Bifaciality factor <sup>5</sup>	Up to 80%
Front side	2.0 mm semi tempered solar glass with Non Reflect technology
Back side	2.0 mm semi tempered solar glass, white mesh
Frame	Stable anodised aluminium frame
Embedding material	POE / EVA
Junction Box   Diodes	IP68   3 Schottky Diodes
Cable	Symmetrical cable lengths > 1.1 m, 4 mm <sup>2</sup> solar cable
Connectors	MC4 or equivalent (IP67)
Hail test (max. hailstorm)	Ø 45 mm   impact velocity 30.7 m/s ± 110.5 km/h



The specifications and average values can vary slightly. Relevant is the corresponding data of the individual measurement.  
 Specifications are subject to change without notice. Tolerance depending on equipment: rated power +/- 3%, other values +/- 10%.  
 All information given in this data sheet corresponds to DIN EN 50380. A potential light-induced degradation of the power after commissioning is not considered here. Further information in the installation manuals.

- The specific warranty conditions are given under [www.luxor.solar/downloads.html](http://www.luxor.solar/downloads.html)
- Horizontal mounted (IEC61215), for details please check mounting instruction
- Tolerance L/W = +/- 3 mm, H +/- 2 mm, the dimensions given in the order confirmation will be decisive
- Location and dimensions of holes on request
- N-Type TOPCon Bifaciality factor 77 +/- 3 %

### Back - / Frontview <sup>3, 4</sup>

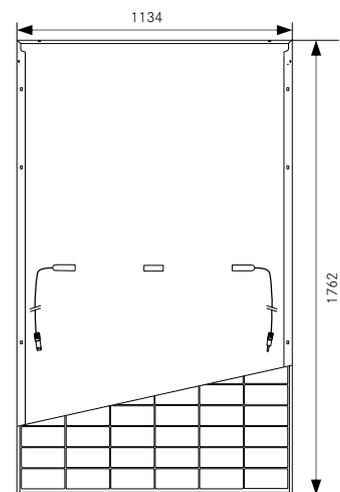

### Electrical characteristics

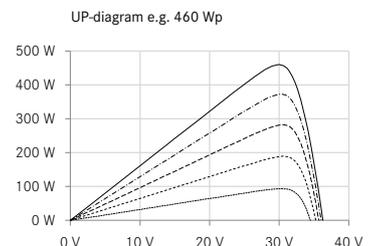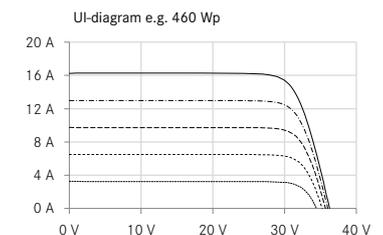

----- 200W/m<sup>2</sup>  
 - - - - - 400W/m<sup>2</sup>  
 - - - - - 600W/m<sup>2</sup>  
 - - - - - 800W/m<sup>2</sup>  
 \_\_\_\_\_ 1000W/m<sup>2</sup>



Guidelines:

- 93/68/EEC
- 2014/35/EU, (LVD)
- 2014/30/EU, (EMC)

The validity of the certificates/listings for a specific country has to be examined under:  
[www.luxor.solar/downloads.html](http://www.luxor.solar/downloads.html)

Your specialised Luxor partner