


LUXOR

solar module manufacturer since 2007



- + SMART: INTELLIGENCE IN THE PRE-CONFECTIONED JUNCTION BOX
- + SYSTEM MONITORING: OPTIMUM PERFORMANCE FOR EACH MODULE
- + GREATEST FLEXIBILITY IN SYSTEM DESIGN
- + ECO: PARTICULARLY ECONOMICAL AND RELIABLE

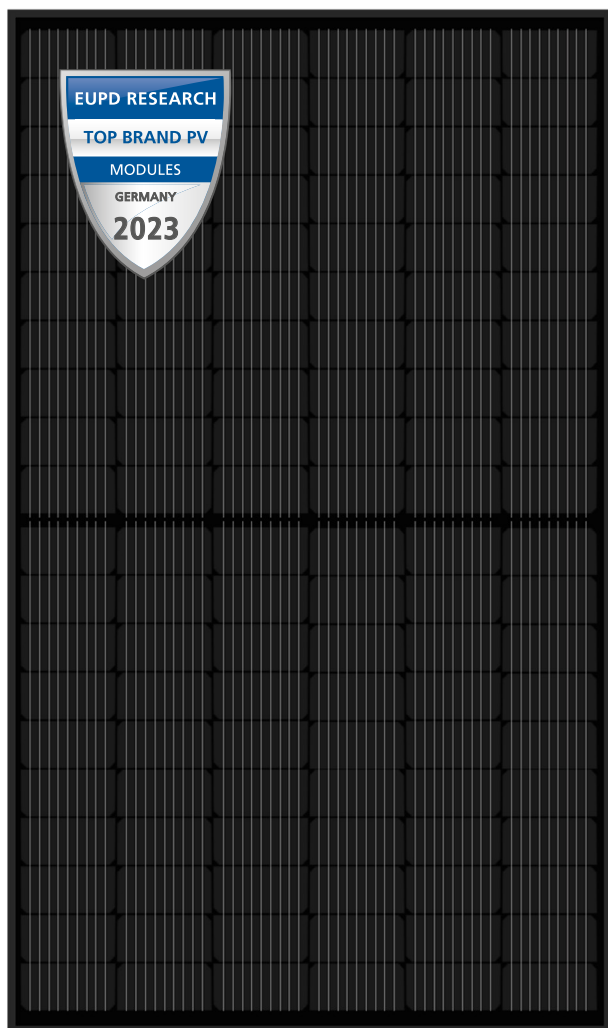

product guarantee¹



linear performance guarantee¹



ECO SMART LINE HALF CELL

M120 / 360 - 380 W

MONOCRYSTALLINE MODULE FAMILY, FULL BLACK



Longlife tested



Power proofed



Safety provided



Selection of components



Cross-linking degree test



Performance surplus of 0 Wp to 6.49 Wp



100% PID free cells



Special packing to avoid micro cracks in the cells



German warrantor

ECO SMART LINE HALF CELL M120 / 360 - 380 W

Optimized by
solar edge

Monocrystalline module family

Module type LX - XXXM/166-120+ | XXX = Rated power Pmpp

Electrical data at STC

Rated power Pmpp [Wp]	360.00	365.00	370.00	375.00	380.00
Pmpp range to	366.49	371.49	376.49	381.49	386.49
Rated current Impp [A]	10.62	10.69	10.77	10.84	10.91
Rated voltage Vmpp [V]	33.94	34.17	34.40	34.63	34.86
Short-circuit current Isc [A]	11.21	11.29	11.37	11.45	11.52
Open-circuit voltage Uoc [V]	40.41	40.68	40.95	41.23	41.50
Efficiency at STC up to	20.12%	20.39%	20.67%	20.94%	21.22%
Efficiency at 200 W/m ²	19.52%	19.78%	20.06%	20.32%	20.59%

Electrical data at NOCT

Power at Pmpp [Wp]	268.21	272.15	274.54	279.31	283.38
Rated current Impp [A]	8.52	8.58	8.61	8.69	8.76
Rated voltage Vmpp [V]	31.49	31.70	31.88	32.13	32.35
Short-circuit current Isc [A]	9.06	9.12	9.19	9.25	9.31
Open-circuit voltage Uoc [V]	37.34	37.60	37.80	38.09	38.36

Specification as per STC (Standard test conditions): irradiance 1000W/m² | module temperature 25°C | Air Mass = 1.5
NOCT (nominal operating cell temperature): irradiance 800W/m² | wind speed 1 m/sec | ambient temperature 20°C | cell operating temperature 45 +/-2°C | Air Mass = 1.5

Limiting values

Max. system voltage [V]	1000 V or 1500 V
Max. return current [I]	20 A
Operating Temperature	-40 to 85°C
Safety class	II
Max. tested pressure load [Pa] ²	5400
Max. tested tensile load [Pa] ²	2400

Temperature coefficient

Temperature coefficient [V] [I] [P]	-0.285% /°C 0.049% /°C -0.360% /°C
---	--

Specifications

Number of cells (matrix)	120 (6 x 20) 166 mm x 83 mm
Module dimensions (LxWxH) ³ Weight	1755 mm x 1038 mm x 40 mm 21,5 kg
Front-side glass	3.2 mm tempered highly transparent, anti-reflection solar glass
Frame	stable, anodised aluminium frame
Junction Box	At least IP67
Cable	symmetrical cable lengths > 1.2 m and 1.2 m, 4 mm ² solar cable
Diodes	3 Schottky Diodes
Plug-in connection	MC4 or equivalent (IP67)
Hail test (max. hailstorm)	Ø 45 mm impact velocity 23 m/s ± 83 km/h

The specifications and average values can vary slightly. Relevant is the corresponding data of the individual measurement. Specifications are subject to change without notice. Measurement tolerance depending on equipment: rated power +/- 3%, other values +/- 10%. All information given in this data sheet corresponds to DIN EN 50380. A potential light-induced degradation of the power after commissioning is not considered here. Further information in the installation manuals.


1 The specific warranty conditions are given under www.luxor.solar/downloads.html.

2 Horizontal mounted, for details please check mounting instruction

3 Tolerance L/W = +/- 3 mm. H +/-2mm, the dimensions given in the order confirmation will be decisive

4 Location and dimensions of holes on request

Back - / Front -/ Side view³

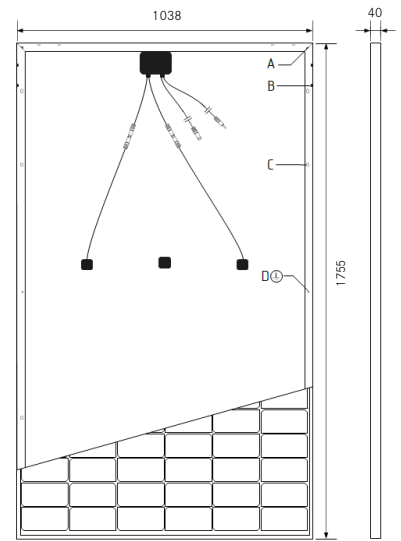


Drilled holes⁴


- A: 4 x drainage
- B: 16 x ventilation
- C: 8 x mounting
- D: 2 x earthing

Electrical characteristics

UI-diagram e.g. LX-350M/166-120+

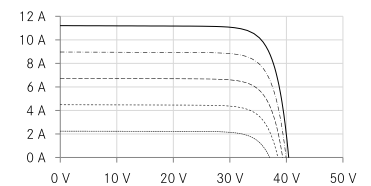

UP-diagram e.g. LX-350M/166-120+

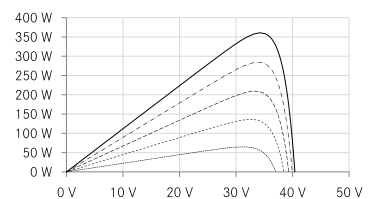

----- 200 W/m²
 - - - - - 400 W/m²
 ——— 600 W/m²
 - - - - - 800 W/m²
 ——— 1000 W/m²

Luxor, your specialised company



IEC
 IEC 61215
 IEC 61730



Guidelines:
 93/68/EEC
 2014/35/EU, (LVD)
 2014/30/EU, (EMC)

The validity of the certificates/listings for a specific country has to be examined under:
www.luxor-solar.com/downloads.html